S

SERIES

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A

PCA-M71HA2

Outdoor Unit

R32

For Single

PUZ-ZM71

R32

For Multi
(Twin/Triple)

PUZ-ZM140/250

Remote Controller

Optional

Optional

Optional

Optional*

* PAR-SA9CA is also required.

PCA-M HA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		–	–	–	71x1	–	–	–	–	–	–	–	–	71x2	–	–	–	–	71x3	–	–
	Distribution Pipe	–	–	–	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E	–	–	–	–	MSDT-111R3-E	–	–

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A

PCA-M71HA2

Outdoor Unit

R410A

For Single

PUHZ-ZRP71

R410A

For Multi
(Twin/Triple)

PUHZ-ZRP140/250

Remote Controller

Optional

Optional

Optional

Optional*

* PAR-SA9CA is also required.

PCA-M HA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		–	–	–	71x1	–	–	–	–	–	–	–	–	71x2	–	–	–	–	71x3	–	–
	Distribution Pipe	–	–	–	–	–	–	–	–	–	–	–	–	MSDD-50TR-E	–	–	–	–	MSDT-111R-E	–	–

PCA-RP HA SERIES
POWER INVERTER



Type				Inverter Heat Pump
Indoor Unit				PCA-M71HA2
Outdoor Unit				PUZ-ZM71VHA2
Refrigerant[*1]				R32
Power Supply	**Source**			Outdoor power supply
	Outdoor(V/Phase/Hz)			230/Single/50
Cooling	**Capacity**	Rated	kW	7.1
		Min-Max	kW	3.3 - 8.1
	Total Input	Rated	kW	2.028
	EER			3.50
	Design load		kW	7.1
	Annual electricity consumption[*2]		kWh/a	443
	SEER[*4]			5.6
		Energy efficiency class		A+
Heating	**Capacity**	Rated	kW	7.6
		Min-Max	kW	3.5 - 10.2
	Total Input	Rated	kW	2.171
	COP			3.50
	Design load		kW	4.7
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)
		at bivalent temperature	kW	4.7 (-10°C)
		at operation limit temperature	kW	3.4 (-20°C)
	Back up heating capacity		kW	0.0
	Annual electricity consumption[*2]		kWh/a	1684
	SCOP[*4]			3.9
		Energy efficiency class		A
Operating Current(Max)			A	19.4
Indoor Unit	**Input [cooling / Heating]**	Rated	kW	0.10 / 0.10
	Operating Current(Max)		A	0.43
	Dimensions	H*W*D	mm	280-1136-650
	Weight		kg	42
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	16-18
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	37-39
	Sound Level (PWL)		dB(A)	57
Outdoor Unit	**Dimensions**	H*W*D	mm	943-950-330(+25)
	Weight		kg	67
	Air Volume	Cooling	m³/min	55
		Heating	m³/min	55
	Sound Level (SPL)	Cooling	dB(A)	47
		Heating	dB(A)	49
	Sound Level (PWL)	Cooling	dB(A)	67
	Operating Current(Max)		A	19
	Breaker Size		A	25
Ext.Piping	**Diameter**[*5]	Liquid/Gas	mm	9.52 / 15.88
	Max.Length	Out-In	m	55
	Max.Height	Out-In	m	30
Guaranteed Operating Range (Outdoor)		Cooling[*3]	°C	-15 ~ +46
		Heating	°C	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PCA-RP HA SERIES
POWER INVERTER



Type				Inverter Heat Pump
Indoor Unit				PCA-M71HA2
Outdoor Unit				PUHZ-ZRP71VHA2
Refrigerant[*1]				R410A
Power Supply	**Source**			Outdoor power supply
	Outdoor(V/Phase/Hz)			230/Single/50
Cooling	**Capacity**	Rated	kW	7.1
		Min-Max	kW	3.3 - 8.1
	Total Input	Rated	kW	2.170
	EER			3.27
	Design load		kW	7.1
	Annual electricity consumption[*2]		kWh/a	444
	SEER[*4]			5.6
		Energy efficiency class		A+
Heating	**Capacity**	Rated	kW	7.6
		Min-Max	kW	3.5 - 10.2
	Total Input	Rated	kW	2.350
	COP			3.23
	Design load		kW	4.7
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)
		at bivalent temperature	kW	4.7 (-10°C)
		at operation limit temperature	kW	3.5 (-20°C)
	Back up heating capacity		kW	0.0
	Annual electricity consumption[*2]		kWh/a	1724
	SCOP[*4]			3.8
		Energy efficiency class		A
Operating Current(Max)			A	19.4
Indoor Unit	**Input [cooling / Heating]**	Rated	kW	0.10 / 0.10
	Operating Current(Max)		A	0.43
	Dimensions	H*W*D	mm	280-1136-650
	Weight		kg	42
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	16-18
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	37-39
	Sound Level (PWL)		dB(A)	57
Outdoor Unit	**Dimensions**	H*W*D	mm	943-950-330(+30)
	Weight		kg	70
	Air Volume	Cooling	m³/min	55
		Heating	m³/min	55
	Sound Level (SPL)	Cooling	dB(A)	47
		Heating	dB(A)	48
	Sound Level (PWL)	Cooling	dB(A)	67
	Operating Current(Max)		A	19
	Breaker Size		A	25
Ext.Piping	**Diameter**[*5]	Liquid/Gas	mm	9.52 / 15.88
	Max.Length	Out-In	m	50
	Max.Height	Out-In	m	30
Guaranteed Operating Range (Outdoor)		Cooling[*3]	°C	-15 ~ +46
		Heating	°C	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PSA SERIES

R32
R410A

PSA-M71/100/125/140KA

Installation of this □oor-standing series is easy and quick.
An excellent choice when there is a sudden need for an air conditioner to be installed.

A slim design the □ts neatly into any space

With a width of only 600mm, this slim unit can fit neatly into narrow spaces.

Built-in MA smart remote controller

The large and easy-to-read LCD makes it easy to perform a variety of functions.

Equipped with a long-life □lter as standard

The adoption of a grille that can be opened allows the filter to be easily removed.

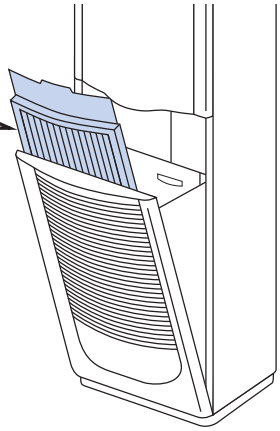

A wide air□ow range with horizontal swinging

The horizontal swinging function can be turned on or off via the remote controller to deliver comfort over a wider area.

Automatic swinging in the horizontal direction

The horizontal-swinging louvers provide wide coverage for improved comfort.

Airflow can also be adjusted manually in the vertical direction.



Floor-standing Line-up

The PSA series was previously only able to be connected to P series outdoor units. However, it can now also be connected to S series outdoor units. This wider lineup provides our customers with a more flexible range of options.

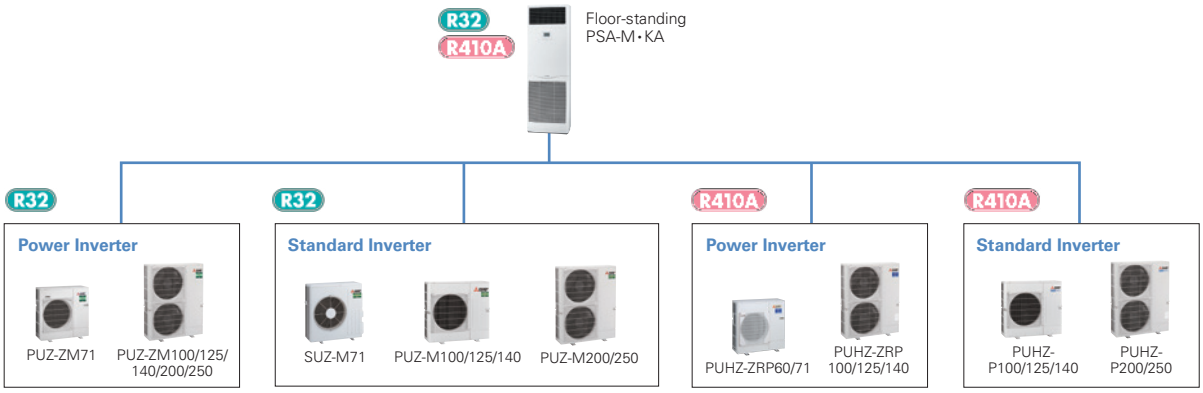

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A

PSA-M71/100/125/140KA

Outdoor Unit

R32

For Single

PUZ-ZM71

PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple)

PUZ-ZM140/200/250

Remote Controller

Built-in

Optional*

* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUZ-ZM)		–	–	–	71x1	100x1	125x1	140x1	–	–	–	–	–	71x2	100x2	125x2	–	–	71x3	–	–
	Distribution Pipe	–	–	–	–	–	–	–	–	–	–	–	–	MSDD -50TR2-E	MSDD-50WR2-E		–	–	MSDT -111R3-E	–	–

SERIES SELECTION

Standard Inverter Series

Indoor Unit

R32
R410A

PSA-M71/100/125/140KA

Outdoor Unit

R32

For Single

SUZ-M71

PUZ-M100/125/140

R32

For Multi
(Twin/Triple)

PUZ-M140

PUZ-M200/250

Remote Controller

Built-in

Optional*

* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																			
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUZ-M)		–	–	–	71x1	100x1	125x1	140x1	–	–	–	–	–	71x2	100x2	125x2	–	–	71x3	–	–
	Distribution Pipe	–	–	–	–	–	–	–	–	–	–	–	–	MSDD -50TR2-E	MSDD-50WR2-E		–	–	MSDT -111R3-E	–	–

PSA-M SERIES
POWER INVERTER

Demand Control (Optional) · Pure White · Long Life · Check! · SWING · ACO · Auto Restart · Low Temp Cooling · Silent · Ampere Limit (71-140V) · Group Control (Optional) · M-NET connection (Optional) · Wi-Fi Interface (Optional) · COMPO · Cleaning-free pipe route · Wiring Reuse (Optional) · Pump Down · Flare connection · Self Diagnosis · Failure Recall

Type				Inverter Heat Pump						
Indoor Unit				PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
Outdoor Unit				PUZ-ZM71VHA2	PUZ-ZM100VKA2	PUZ-ZM100YKA2	PUZ-ZM125VKA2	PUZ-ZM125YKA2	PUZ-ZM140VKA2	PUZ-ZM140YKA2
Refrigerant[*1]				R32						
Power Supply	Source			Outdoor power supply						
	Outdoor(V/Phase/Hz)			VKA・VHA:230/Single/50, YKA:400/Three/50						
Cooling	Capacity	Rated	kW	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max	kW	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated	kW	1.888	2.493	2.493	3.955	3.955	3.976	3.976
	EER			3.76	3.81	3.81	3.16	3.16	3.37	3.37
	Design load		kW	7.1	9.5	9.5	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	388	581	592	–	–	–	–
	SEER[*4]			6.4	5.7	5.6	–	–	–	–
		Energy efficiency class		A++	A+	A+	–	–	–	–
Heating	Capacity	Rated	kW	7.6	11.2	11.2	14.0	14.0	16.0	16.0
		Min-Max	kW	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5 - 16.0	5 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated	kW	2.338	3.172	3.172	4.501	4.501	5.000	5.000
	COP			3.25	3.53	3.53	3.11	3.11	3.20	3.20
	Design load		kW	4.7	7.8	7.8	–	–	–	–
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	–	–	–	–
		at bivalent temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	–	–	–	–
		at operation limit temperature	kW	3.4 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	–	–	–	–
	Back up heating capacity		kW	0.0	0.0	0.0	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	1636	2658	2659	–	–	–	–
	SCOP[*4]			4.0	4.1	4.1	–	–	–	–
		Energy efficiency class		A+	A+	A+	–	–	–	–
Operating Current(Max)			A	19.4	20.7	8.7	27.2	9.7	30.7	12.5
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		A	0.4	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight		kg	46	46	46	46	46	48	48
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66
Outdoor Unit	Dimensions	H*W*D	mm	943-950-330(+25)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	67	105	111	105	114	105	118
	Air Volume	Cooling	m³/min	55	110	110	120	120	120	120
		Heating	m³/min	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	47	49	49	50	50	50	50
		Heating	dB(A)	49	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	67	69	69	70	70	70	70
	Operating Current(Max)		A	19	20	8	26.5	9	30	11.8
	Breaker Size		A	25	32	16	32	16	40	16
Ext.Piping	Diameter[*5]	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	55	100	100	100	100	100	100
	Max.Height	Out-In	m	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)		Cooling[*3]	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C. *4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.

PSA-M SERIES
STANDARD INVERTER

Demand Control (Optional) · Pure White · Long Life · Check! · SWING · ACO · Auto Restart · Low Temp Cooling · Silent · Group Control (Optional) · M-NET connection (Optional) · Wi-Fi Interface (Optional) · COMPO · Cleaning-free pipe route · Wiring Reuse (Optional) · Pump Down · Flare connection · Self Diagnosis · Failure Recall

Type				Inverter Heat Pump						
Indoor Unit				PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
Outdoor Unit				SUZ-M71VA	PUZ-M100VKA2	PUZ-M100YKA2	PUZ-M125VKA2	PUZ-M125YKA2	PUZ-M140VKA2	PUZ-M140YKA2
Refrigerant[*1]				R32						
Power Supply	Source			Outdoor power supply						
	Outdoor(V/Phase/Hz)			VA, VKA:230/Single/50, YKA:400/Three/50						
Cooling	Capacity	Rated	kW	7.1	9.4	9.4	12.1	12.1	13.6	13.6
		Min-Max	kW	2.2 - 8.1	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 13.7	5.8 - 13.7
	Total Input	Rated	kW	1.972	2.686	2.686	4.481	4.481	5.037	5.037
	EER			3.60	3.50	3.50	2.70	2.70	2.70	2.70
	Design load		kW	7.1	9.4	9.4	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	394	591	591	–	–	–	–
	SEER[*4]			6.3	5.5	5.5	–	–	–	–
		Energy efficiency class		A++	A	A	–	–	–	–
Heating	Capacity	Rated	kW	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	2.1 - 10.2	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8
	Total Input	Rated	kW	2.492	3.246	3.246	4.355	4.355	4.761	4.761
	COP			3.21	3.45	3.45	3.10	3.10	3.15	3.15
	Design load		kW	5.8	8.0	8.0	–	–	–	–
	Declared Capacity	at reference design temperature	kW	5.2 (-10°C)	6.0 (-10°C)	6.0 (-10°C)	–	–	–	–
		at bivalent temperature	kW	5.2 (-7°C)	7.0 (-7°C)	7.0 (-7°C)	–	–	–	–
		at operation limit temperature	kW	5.2 (-10°C)	4.5 (-15°C)	4.5 (-15°C)	–	–	–	–
	Back up heating capacity		kW	0.6	2.0	2.0	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	2003	2745	2745	–	–	–	–
	SCOP[*4]			4.0	4.0	4.0	–	–	–	–
		Energy efficiency class		A+	A+	A+	–	–	–	–
Operating Current(Max)			A	15.2	20.7	12.2	27.2	12.2	30.7	12.2
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		A	0.4	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight		kg	46	46	46	46	46	48	48
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66
Outdoor Unit	Dimensions	H*W*D	mm	880-840-330	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)	981-1050-330(+40)
	Weight		kg	55	76	78	84	85	84	85
	Air Volume	Cooling	m³/min	50.1	79	79	86	86	86	86
		Heating	m³/min	50.1	79	79	92	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	49	51	51	54	54	55	55
		Heating	dB(A)	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	66	70	70	72	72	73	73
	Operating Current(Max)		A	14.8	20	11.5	26.5	11.5	30	11.5
	Breaker Size		A	20	32	16	32	16	40	16
Ext.Piping	Diameter[*5]	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	30	55	55	65	65	65	65
	Max.Height	Out-In	m	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)		Cooling[*3]	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-10 ~ +24	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012.
*5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A

PSA-M71/100/125/140KA

Outdoor Unit

R410A

For Single

PUHZ-ZRP71

PUHZ-ZRP100/125/140

R410A

For Multi
(Twin/Triple)

PUHZ-ZRP140/200/250

Remote Controller

Built-in

Optional*

* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single									For Twin						For Triple			For Quadruple	
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)	–	–	–	71x1	100x1	125x1	140x1	–	–	–	–	–	71x2	100x2	125x2	–	–	71x3	–	–
Distribution Pipe	–	–	–	–	–	–	–	–	–	–	–	–	MSDD-50TR-E	MSDD-50WR-E		–	–	MSDT-111R-E	–	–

SERIES SELECTION

Standard Inverter Series

Indoor Unit

R32
R410A

PSA-M71/100/125/140KA

Outdoor Unit

R410A

For Single

PUHZ-P100/125/140

R410A

For Multi
(Twin/Triple)

PUHZ-P140

PUHZ-P200/250

Remote Controller

Built-in

Optional*

* PAR-SA9CA-E is also required.

PSA-M Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination	Outdoor Unit Capacity																			
	For Single									For Twin						For Triple			For Quadruple	
	35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P)	–	–	–	–	100x1	125x1	140x1	–	–	–	–	–	71x2	100x2	125x2	–	–	71x3	–	–
Distribution Pipe	–	–	–	–	–	–	–	–	–	–	–	–	MSDD-50TR-E	MSDD-50WR-E		–	–	MSDT-111R-E	–	–

PSA-RP SERIES
POWER INVERTER

Demand Control (Optional) · Pure White · Long Life · Check! · SWING · ACO · Auto Restart · Low Temp Cooling · Silent · Ampere Limit (71-140V) · Group Control (Optional) · M-NET connection (Optional) · Wi-Fi Interface (Optional) · COMPO · Cleaning-free pipe reuse · Wiring Reuse (Optional) · Pump Down · Flare connection · Self Diagnosis · Failure Recall

Type				Inverter Heat Pump						
Indoor Unit				PSA-M71KA	PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
Outdoor Unit				PUHZ-ZRP71VHA2	PUHZ-ZRP100VKA3	PUHZ-ZRP100YKA3	PUHZ-ZRP125VKA3	PUHZ-ZRP125YKA3	PUHZ-ZRP140VKA3	PUHZ-ZRP140YKA3
Refrigerant[*1]				R410A						
Power Supply	Source			Outdoor power supply						
	Outdoor(V/Phase/Hz)			VKA・VHA:230/Single/50, YKA:400/Three/50						
Cooling	Capacity	Rated	kW	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min-Max	kW	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.0	6.2 - 15.0
	Total Input	Rated	kW	1.890	2.500	2.500	4.084	4.084	4.060	4.060
	EER			3.76	3.80	3.80	3.06	3.06	3.30	3.30
	Design load		kW	7.1	9.5	9.5	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	394	584	595	–	–	–	–
	SEER[*4]			6.3	5.6	5.5	–	–	–	–
		Energy efficiency class		A++	A+	A	–	–	–	–
Heating	Capacity	Rated	kW	7.6	11.2	11.2	14.0	14.0	16.0	16.0
		Min-Max	kW	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated	kW	2.210	3.080	3.080	4.242	4.242	4.790	4.790
	COP			3.44	3.64	3.64	3.30	3.30	3.34	3.34
	Design load		kW	4.7	7.8	7.8	–	–	–	–
	Declared Capacity	at reference design temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	–	–	–	–
		at bivalent temperature	kW	4.7 (-10°C)	7.8 (-10°C)	7.8 (-10°C)	–	–	–	–
		at operation limit temperature	kW	3.5 (-20°C)	5.8 (-20°C)	5.8 (-20°C)	–	–	–	–
	Back up heating capacity		kW	0.0	0.0	0.0	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	1668	2730	2731	–	–	–	–
	SCOP[*4]			3.9	3.9	3.9	–	–	–	–
		Energy efficiency class		A	A	A	–	–	–	–
Operating Current(Max)			A	19.4	27.2	8.7	27.2	10.2	28.7	13.7
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.06 / 0.06	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		A	0.4	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight		kg	46	46	46	46	46	48	48
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	20-22-24	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	40-42-44	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	60	65	65	66	66	66	66
Outdoor Unit	Dimensions	H*W*D	mm	943-950-330(+30)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)	1338-1050-330(+40)
	Weight		kg	70	116	123	116	125	118	131
	Air Volume	Cooling	m³/min	55	110	110	120	120	120	120
		Heating	m³/min	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	47	49	49	50	50	50	50
		Heating	dB(A)	48	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	67	69	69	70	70	70	70
	Operating Current(Max)		A	19	26.5	8	26.5	9.5	28	13
	Breaker Size		A	25	32	16	32	16	40	16
Ext.Piping	Diameter[*5]	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	75	75	75	75	75	75
	Max.Height	Out-In	m	30	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)		Cooling[*3]	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21	-20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.

PSA-RP SERIES
STANDARD INVERTER

Demand Control (Optional) · Pure White · Long Life · Check! · SWING · ACO · Auto Restart · Low Temp Cooling · Silent · Group Control (Optional) · M-NET connection (Optional) · Wi-Fi Interface (Optional) · COMPO · Cleaning-free pipe reuse · Wiring Reuse (Optional) · Pump Down · Flare connection · Self Diagnosis · Failure Recall

Type				Inverter Heat Pump					
Indoor Unit				PSA-M100KA	PSA-M100KA	PSA-M125KA	PSA-M125KA	PSA-M140KA	PSA-M140KA
Outdoor Unit				PUHZ-P100VKA	PUHZ-P100YKA	PUHZ-P125VKA	PUHZ-P125YKA	PUHZ-P140VKA	PUHZ-P140YKA
Refrigerant[*1]				R410A					
Power Supply	Source			Outdoor power supply					
	Outdoor(V/Phase/Hz)			VKA:230/Single/50, YKA:400/Three/50					
Cooling	Capacity	Rated	kW	9.4	9.4	12.1	12.1	13.6	13.6
		Min-Max	kW	3.7 - 10.6	3.7 - 10.6	5.6 - 13.0	5.6 - 13.0	5.8 - 13.7	5.8 - 13.7
	Total Input	Rated	kW	3.122	3.122	5.020	5.020	6.384	6.384
	EER			3.01	3.01	2.41	2.41	2.13	2.13
	Design load		kW	9.4	9.4	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	644	644	–	–	–	–
	SEER[*4]			5.1	5.1	–	–	–	–
		Energy efficiency class		A	A	–	–	–	–
Heating	Capacity	Rated	kW	11.2	11.2	13.5	13.5	15.0	15.0
		Min-Max	kW	2.8 - 12.5	2.8 - 12.5	4.8 - 15.0	4.8 - 15.0	4.9 - 15.8	4.9 - 15.8
	Total Input	Rated	kW	3.284	3.284	4.804	4.804	4.823	4.823
	COP			3.41	3.41	2.81	2.81	3.11	3.11
	Design load		kW	8.0	8.0	–	–	–	–
	Declared Capacity	at reference design temperature	kW	6.0 (-10°C)	6.0 (-10°C)	–	–	–	–
		at bivalent temperature	kW	7.0 (-7°C)	7.0 (-7°C)	–	–	–	–
		at operation limit temperature	kW	4.5 (-15°C)	4.5 (-15°C)	–	–	–	–
	Back up heating capacity		kW	2.0	2.0	–	–	–	–
	Annual electricity consumption[*2]		kWh/a	2797	2797	–	–	–	–
	SCOP[*4]			4.0	4.0	–	–	–	–
		Energy efficiency class		A+	A+	–	–	–	–
Operating Current(Max)			A	20.7	12.2	27.2	12.2	30.7	12.2
Indoor Unit	Input [cooling / Heating]	Rated	kW	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11	0.11 / 0.11
	Operating Current(Max)		A	0.71	0.71	0.73	0.73	0.73	0.73
	Dimensions	H*W*D	mm	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360	1900-600-360
	Weight		kg	46	46	46	46	48	48
	Air Volume (Lo-Mi2-Mi1-Hi)		m³/min	25-28-30	25-28-30	25-28-31	25-28-31	25-28-31	25-28-31
	Sound Level (Lo-Mi2-Mi1-Hi) (SPL)		dB(A)	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51	45-49-51
	Sound Level (PWL)		dB(A)	65	65	66	66	66	66
Outdoor Unit	Dimensions	H*W*D	mm	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330	981-1050-330
	Weight		kg	76	78	84	85	84	85
	Air Volume	Cooling	m³/min	79	79	86	86	86	86
		Heating	m³/min	79	79	92	92	92	92
	Sound Level (SPL)	Cooling	dB(A)	51	51	54	54	56	56
		Heating	dB(A)	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	70	70	72	72	75	75
	Operating Current(Max)		A	20	11.5	26.5	11.5	30	11.5
	Breaker Size		A	32	16	32	16	40	16
Ext.Piping	Diameter[*5]	Liquid/Gas	mm	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max.Length	Out-In	m	50	50	50	50	50	50
	Max.Height	Out-In	m	30	30	30	30	30	30
Guaranteed Operating Range (Outdoor)		Cooling[*3]	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46
		Heating	°C	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21	-15 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 1975. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 1975 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.The GWP of R410A is 2088 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C.
*4 SEER and SCOP are based on 2009/125/EC:Energy-related Products Directive and Regulation(EU) No206/2012. *5 Joint pipe is required depending on installed refrigerant pipes, outdoor units and indoor units.